

TWO-POST - DP10



*Engineered to Perform...
Built to Last*



FORWARD[®] LIFT
A **DOVER[™]** COMPANY

Forward: Engineered to Perform...

- Forward™ lifts are designed in the United States by U.S. engineers.
- Forward Lift's worldwide manufacturing locations are ISO9001 Quality Systems certified ensuring you the best quality products.
- Most of our lifts are third party certified & labeled by a nationally recognized testing laboratory, ETL to ensure they meet or exceed all applicable ANSI standards.



Look for the gold label.

- We have one of the best service networks in the industry which provides professional customer support.
- Forward Lift has been an active member of ALI (Automotive Lift Institute) for over 14 years.
- All Forward products are backed by a strong manufacturers warranty.
- Our parts retrieval system allows for shipment of most parts orders within 24 hours.



Features of Forward DP Series Lifts:

- Direct-Pull Lifting – High efficiency, low maintenance technology
- Closed loop hydraulic system – preventing hydraulic contamination
- Powder coat, oven baked finish – more durable than conventional coatings
- ALI/ETL third party tested & approved
- Padded shut-off bar
- High tech gear style arm restraints
- Low profile arms
- Includes truck adapters
- Dual safety release system
- Optional narrow bay model
- Optional high rise and extended height available



Low-Profile Design:
The DP10 features low-profile / oversized pads with multiple extensions to raise most vehicles on

the road today. Includes four each of the following extensions: 1.5", 3" and 6"




Shown: Model DP10S
10000 lbs. capacity



Shown: Model DP10A
10000 lbs. capacity

...Built to Last.

Padded shut-off bar to prevent damage caused by lifting a vehicle too high

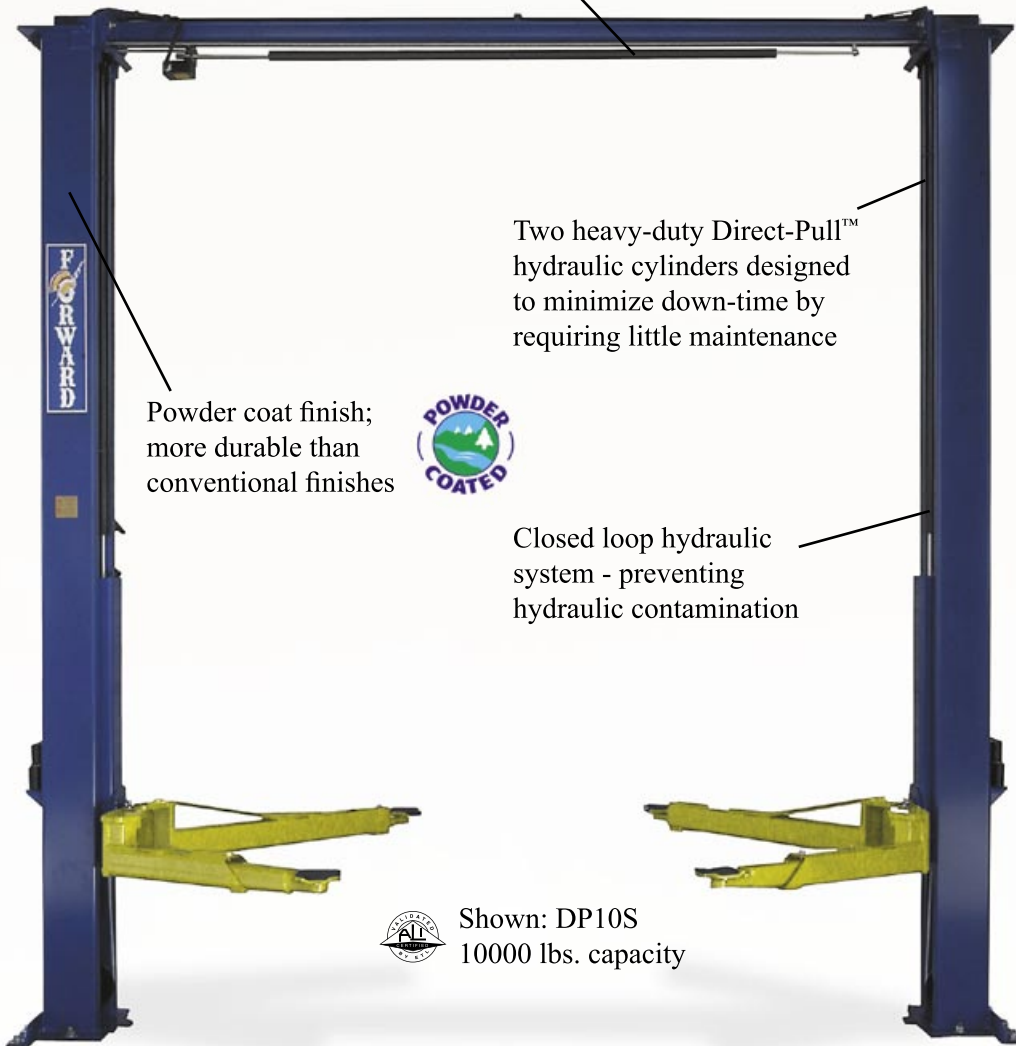

Two heavy-duty Direct-Pull™ hydraulic cylinders designed to minimize down-time by requiring little maintenance


Powder coat finish; more durable than conventional finishes



Closed loop hydraulic system - preventing hydraulic contamination



Shown: DP10S
10000 lbs. capacity

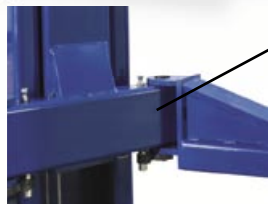

High tech gear style arm-restraints allowing quick and easy placement of the lift arms



The DP10 lift is certified by ALI (Automotive Lift Institute) to meet American National Standard ANSI/ALI ALCTV-1998 and ANSI/UL201-2006 Standard.

Engineering Excellence

Forward Lift products are *engineered to perform* and *built to last*. Forward's U.S. engineers have over 29 years of combined experience designing automotive lifts for service and repair shops. Forward's philosophy is to own our designs rather than use someone else's off the shelf product.

Product Integrity

21st century design tools allow us to create, control and validate our designs to ensure maximum performance. Forward lifts are rigorously tested to meet quality and durability standards. All product families are proof load tested to 1½ times rated capacity and rigorously cycle tested.



Cycle testing in our R&D facility

Specifications	DP10A DP10A2 DP10A2-HR	DP10S DP10S2 DP10S2-HR	DP10AN DP10AN2 DP10AN2-HR
Capacity*	10,000 lbs. (4536kg)	10,000 lbs. (4536kg)	10,000 lbs. (4536kg)
Overall Height	143-3/8" (3642mm)	143-3/8" (3642mm)	143-3/8" (3642mm)
	167" (4242mm)	167" (4242mm)	167" (4242mm)
	167" (4242mm)	167" (4242mm)	167" (4242mm)
Height to Shut-Off	136" (3454mm)	136" (3454mm)	136" (3454mm)
	160" (4064mm)	160" (4064mm)	160" (4064mm)
	160" (4064mm)	160" (4064mm)	160" (4064mm)
Minimum Ceiling Height	144" (3658mm)	144" (3658mm)	144" (3658mm)
	168" (4268mm)	168" (4268mm)	168" (4268mm)
	168" (4268mm)	168" (4268mm)	168" (4268mm)
Minimum Adapter Height (standard adapters)	3-5/8" (93mm)	3-5/8" (93mm)	3-5/8" (93mm)
	3-5/8" (93mm)	3-5/8" (93mm)	3-5/8" (93mm)
	3-5/8" (93mm)	3-5/8" (93mm)	3-5/8" (93mm)
Maximum Lifting Height (standard adapters)	71" (1804mm)	71" (1804mm)	71" (1804mm)
	71" (1804mm)	71" (1804mm)	71" (1804mm)
	80" (2032mm)	80" (2032mm)	80" (2032mm)
Adapter Extension Heights (stack type)	1-1/2" (38mm), 3" (76mm), and 6" (152mm)	1-1/2" (38mm), 3" (76mm), and 6" (152mm)	1-1/2" (38mm), 3" (76mm), and 6" (152mm)
Overall Floor Width	137" (3480mm)	137" (3480mm)	128" (3251mm)
Inside Column Width	115-3/4" (2940mm)	115-3/4" (2940mm)	106-3/4" (2711mm)
Drive Through	95" (2413mm)	104" (2642mm)	86" (2184mm)
Voltage†	208/230v	208/230v	208/230v
Amps	20	20	20
Motor	2 HP	2 HP	2 HP

* Capacity 2500 lbs. per arm

† single phase standard; 3-phase available at additional cost

(Standard lift colors include blue and red.)



Forward Lift
996 Industrial Drive
Madison, IN 47250
Phone: 800.423.1722
Fax: 812.273.7329

www.forwardlift.com

Lit# DPO10_2007.10

©2007 Forward®, Printed in U.S.A., All Rights Reserved. Unless otherwise indicated, FORWARD DOVER and all other trademarks are property of Dover Corporation and its affiliates.

